

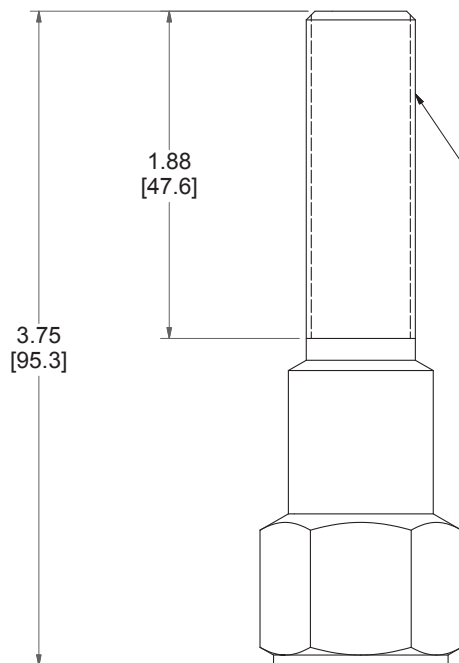




MODEL 73: 5/8-18
MODEL 73M: M18-1

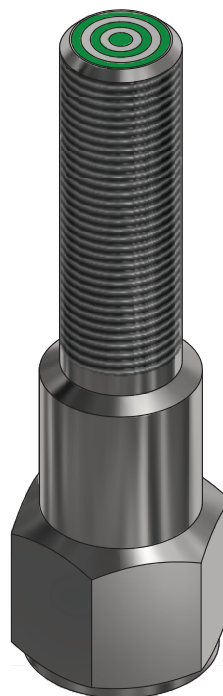

MODEL NUMBER

73-1356T-B6

PRODUCT LINE


GO™ Switch 70 Series Hex Head

SPECIFICATIONS

Model	73 Model
Contact Form	SPDT
Sensing Range	0.100" end sensing
Outlet Position	Bottom of enclosure
Enclosure Material	316L Stainless Steel
Area Classification	ATEX/IECEX Zone 1, Exdb
Wiring Option	PVC cable, 50ft
Regional Certification	No Regional Certification
Custom Field	

WIRING DIAGRAM

PVC CABLE — 4 WIRE
SPDT



Current as of July 22, 2019 – Subject to change without notice.

NAMEPLATE



Ex db IIC T6 Gb
Ex tb IIIC T85°C Db
-60°C ≤ Ta ≤ 50°C; IP66
120VAC/4A; 24VDC/3A Resistive
Conduit: 1/2 NPT - Hermetically Sealed
Baseefa 08ATEX0360X IECEx BAS 08.0122X



TOPWORX™

3300 Fern Valley Road
Louisville, KY 40213

(502)969-8000 PH
(502)969-5911 FAX
www.topworx.com