



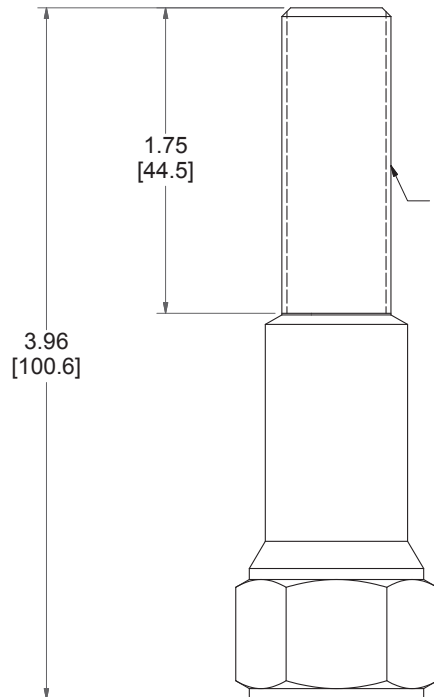

MODEL 7G: 5/8-18
MODEL 7GM: M18-1



MODEL NUMBER

7G-13563-A4

PRODUCT LINE


GO™ Switch 70 Series Hex Head

SPECIFICATIONS

Model	7G Model
Contact Form	SPDT
Sensing Range	0.100" end sensing
Outlet Position	Bottom of enclosure
Enclosure Material	316L Stainless Steel
Area Classification	UL CI I, Div 1
Wiring Option	PVC leads, 12ft
Regional Certification	No Regional Certification
Custom Field	


WIRING DIAGRAM

PVC/PTFE LEADS – 4 WIRE
SPDT



Current as of February 21, 2019 – Subject to change without notice.

NAMEPLATE



Ind. Cont. Eq. for Hazardous Locations
Class I, Division 1, Groups A,B,C,D; Type 4X
Class II, Division 1, Groups E,F,G; Class III
120VAC/4A; 24VDC/3A Resistive
Conduit: 1/2 NPT - Hermetically Sealed



TOPWORX™

3300 Fern Valley Road
Louisville, KY 40213

(502)969-8000 PH
(502)969-5911 FAX
www.topworx.com