
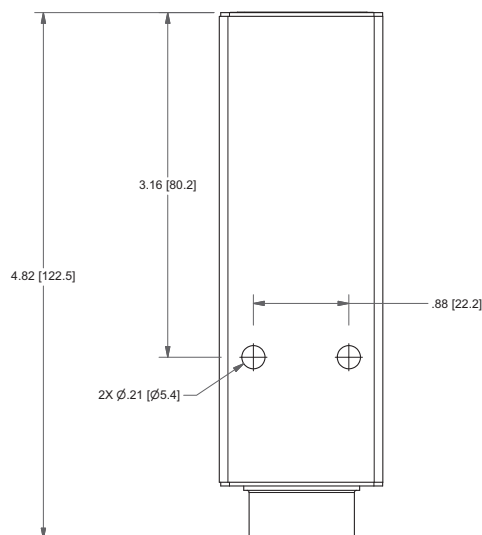




MODEL NUMBER

81-20516-A2


PRODUCT LINE

GO Switch Model 81

SPECIFICATIONS

Model	81 Model
Contact Form	DPDT (Form CC)
Sensing Range	Approx. 1/4" end sensing
Outlet Position	Bottom of enclosure
Enclosure Material	Standard Enclosure
Area Classification	CSA/FM CI 1, Div 2
Wiring Options	3ft PVC lead wires
Regional Certification	no regional certification
Custom field	TopWorx Certified: IP 66/67/68, NEMA 4x/6/6P

WIRING DIAGRAM

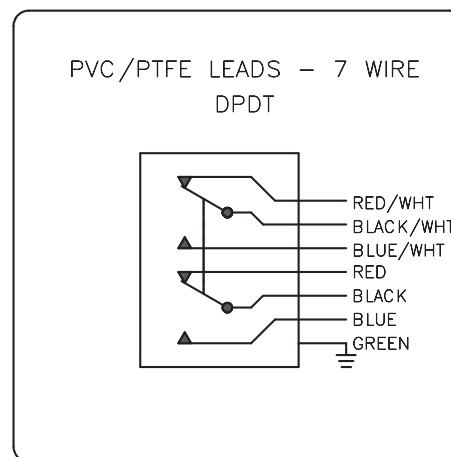

Current as of June 23, 2025 – Subject to change without notice.

NAMEPLATE

GO SWITCH    
3300 Fern Valley Road
TopWorx 40213, USA
CL I DIV 2, GRPS A,B,C,D; CL II DIV 2, GRPS F,G; CI III;
IND. CON. EQ. FOR HAZ. LOC.
ELECTRICAL RATING: 120VAC/10A, 24VDC/1A RESISTIVE; 600VAC MAX
LEAD SEAL IS REQUIRED WITHIN 18" OF ENCLOSURE.

Model #:

Serial #:

**GO
SWITCH**

TOPWORX™

3300 Fern Valley Road
Louisville, KY 40213

(502)969-8000 PH
(502)969-5911 FAX
www.topworx.com